

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of: Paul EVANS

For: METHOD, SYSTEM AND RADIO BASE STATION FOR PAGING A
MOBILE STATION IN A THIRD GENERATION GENERAL PACKET RADIO
SERVICE (GPRS) NETWORK

BOX APPLICATION
Assistant Commissioner
for Patents
Washington, D.C. 20231

Sir:

PATENT APPLICATION TRANSMITTAL LETTER

Transmitted herewith for filing, please find the following:

- ☒ Specification, claims and abstract of the above-referenced patent application (total of 26 pages).
- ☒ 4 sheet(s) of drawing(s) (☒ formal / ☐ informal).
- ☒ Combined Declaration and Power of Attorney.
- ☒ An Assignment of the invention to: Telefonaktiebolaget L M Ericsson
- ☐ A verified statement claiming small entity status under 37 CFR 1.9 and 1.27.
- ☒ Other (specify): ☒ Acknowledgement postcard
 - ☒ Assignment Recordal Cover Sheet
 - ☒ Information Disclosure Statement

The filing fee has been calculated as shown below:

	NO. FILED	NO. EXTRA	RATE	FEE
<u>BASIC FEE</u>				\$ 690.00
<u>TOTAL CLAIMS</u>	<u>15-20</u>		<u>\$18.</u>	\$
<u>INDEPENDENT CLAIMS</u>	<u>4-3</u>	<u>1</u>	<u>\$78.</u>	\$ 78.00
<u>MULTIPLE DEPENDENT CLAIM(S) PRESENTED</u>			<u>\$260.</u>	\$ _____
<u>TOTAL FEES:</u>				<u>\$ 768.00</u>
<u>Deduct one-half of fee for Small Entity</u>				- _____
<u>ASSIGNMENT RECORDAL FEE</u>			<u>\$40.</u>	<u>\$ 40.00</u>
<u>TOTAL AMOUNT DUE:</u>				<u>\$ 808.00</u>

- ☒ Please charge my Deposit Account No. 50-0301 in the amount of \$ 808.00.
- ☐ A check in the amount of \$ _____ is attached. Please charge any deficiency or credit any overpayment to Deposit Account No. 50-0301.
- ☒ The Commissioner is hereby authorized to charge payment of the following fees during the pendency of this application or credit any overpayment to Deposit Account No. 50-0301.
- ☒ Any patent application processing fees under 37 CFR 1.17 and under 37 CFR 1.20 (d).
- ☐ The issue fee set in 37 CFR 1.18 at or before mailing of the Notice of Allowance, pursuant to 37 CFR 1.311 (b).
- ☒ Any filing fees under 37 CFR 1.16 including fees for presentation of extra claims.

Date: April 14, 2000

S. Beauchesne
 Signature
 Sandra Beauchesne
 Registration: No. 43,422

**Method, System and Radio Base Station for Paging a Mobile
Station in a Third Generation General Packet Radio Service
(GPRS) Network**

5 **BACKGROUND OF THE INVENTION**

Field of the Invention

The present invention relates to method and system for
paging for a Mobile Station (MS) in a General Packet Radio
10 Service (GPRS) wherein the Base Stations (BSs) comprise a
portion of the routing area-cell mapping information.

Description of the Related Art

15 Wireless communications have changed over the last
decade, evolving from the first generation of analog cellular
service, to the second generation of digital cellular

service. Among other advantages, digital cellular service allows subscribers to receive enhanced voice and data communications, while increasing the number of channels available in a given area. However, as the demand for wide-
5 band wireless data transmission becomes more and more significant, and since cellular operators foresee a great business opportunity in fulfilling the subscribers' request for the wireless wide-band transmissions, a third generation of cellular networks is under way of being achieved and
10 implemented. The third generation of cellular networks allows wide-band voice and data transmission at rates of up to 2 Mega-bits per second, and make use of improved existing technology. For example, the Wide-band Code Division Multiple Access (W-CDMA), the Enhanced Data rates for Global Evolution
15 (EDGE), and the General Packet Radio Service (GPRS) are all third-generation technologies that may provide high-speed connection of a Mobile Station (MS) in a pure third-generation cellular network, or in a network comprising both third-generation systems combined with legacy systems (second
20 generation and first generation systems).

In particular, GPRS is a packet-based wireless communication service that can provide transmission data rates from 56 up to 114 Kbps and continuous connection to the Internet for MSs and computer users. The higher data rates
25 will allow users to take part in video conferences and

interact with multimedia Web sites and similar applications using mobile handheld devices as well as notebook computers. GPRS is based on Global System for Mobile (GSM) communications and will complement existing services provided by the legacy systems. In theory, GPRS packet-based service should cost users less than circuit-switched services since communication channels are being used on a shared-use, as-packets-are-needed basis rather than dedicated only to one user at a time. It should also be easier to make applications available to mobile users because the faster data rate means that middleware currently needed to adapt applications to the slower speed of wireless systems will no longer be needed. Once GPRS becomes available, mobile users of a virtual private network (VPN) will be able to access the private network continuously rather than through a dial-up connection.

A typical GPRS network comprises a Gateway GPRS Support Node (GGSN) which acts as an interface between the packet core network and the public IP network, a Serving GPRS Support Node (SGSN) which is the GPRS network's switching node, a GPRS Home Location register (HLR) holding the subscribers' data, a plurality of Base Station Controllers (BSCs), each managing one or more Radio Base Stations (RBSs) which are responsible for the actual radio communications with the MSs. Cellular operators' requirement for flexible

open systems is driving the implementation of Internet Protocol (IP) based networks. Such an IP connection may be implemented between the SGSN and the BSCs and further between the BSCs and the RBSs.

5 Current GPRS systems combined with and deployed in GSM networks make use of the BSCs to initiate paging on the Packet Data Control Channel (PDCH), which is the channel type used in GPRS between the BSCs and the RBSs. Communications between the SGSNs and the Radio Access Network (RAN) are
10 governed in a GPRS network by the Base Station Subsystem GPRS Protocol (BSSGP), herein enclosed by reference. A Packet Control Unit (PCU) located in each BSC is responsible for interpreting the BSSGP page messages received from the SGSN, and for passing the page requests to the BSC application
15 software, which in turn initiates the actual page on the PDCHs associated with the routing area (RA) designated in the BSSGP page message received from the SGSN.

However, in the situation described hereinbefore, wherein a page for a particular MS is initiated by the
20 network, it has been noticed that the time required for a page to be transmitted on the air interface may be significantly increased in a 3rd generation IP-based radio access network. This is due to the non-dedicated nature of the IP-based transmission that require longer time for packet
25 data signaling than in the legacy systems wherein control

channels were allocated a particular physical communication link.

In particular, in a GPRS network, the Radio Network Server (RNS) typically communicates directly with the SGSN and handles all real-time activities of the RAN, which may comprise the set of BSCs and RBSSs. Such real-time activities comprise the page processing using routing area-cell mapping information, i.e. the real-time interpretation and conversion of each page destination address into cell page signals to be transmitted to the controlling RBS from the RNS, seizure of traffic channels and updating of radio parameters in the RBS. The Radio Network Management Control Point (RMCP) is the GPRS network node dedicated to the non-real-time activities related to the RAN, such as the storing of the routing area-cell mapping information and cells configuration in an information database, which regularly updates RNS with parameters related to real-time page processing. However, it has been noticed that in the IP-based GPRS RAN configuration wherein the SGSN acquires knowledge of the RA from the network management system, the time for the page to reach the intended MS is increased when compared with second generation (2G) radio access networks. This is because the page sent from the SGSN and containing RA information must pass via the RNS, which is located in the radio access network, then sent

on a non-dedicated channel toward the RBSs for finally being radio broadcast.

In order to support higher data rates and real-time applications the European Telecommunications Standards Institute (ETSI) GPRS are currently being modified to cover the introduction of EDGE-based GPRS technology for the GSM and ANSI-41 markets. For supporting such higher data rates, GPRS designers may propose to include the Radio Link Control/Medium Access Control (RLC/MAC) functionality of the PCU in closer physical proximity to the Channel Codec Unit (CCU). This is believed to eliminate delays which would be introduced when communications between these two physical/functional entities are performed over an IP-based RAN. Voice-over-IP implementation is particularly sensitive to this delay. However, such a change will have impacts on currently used scheme for handling the routing area-cell mapping processing for each page, and there is currently no solution for this matter.

It would be advantageous to have a more straightforward way for sending a page request from the SGSN to the RBSs than in the scenario described hereinbefore. It would be even more advantageous to have a page request being send without the need to pass through a BSC, wherein the routing area-cell-mapping processing would be delegated to each RBS receiving

the page, so that the intermediate processing of the page request is avoided.

The present invention describes such a solution.

5

Summary of the Invention

It is therefore an object of the present invention to provide a Radio Base Station (RBS) that comprises a portion of the master routing area-cell mapping table, relevant for that particular RBS, so that the page processing is distributed to each RBS of the GPRS telecommunications network.

It is another object of the present invention to provide a method for paging for a Mobile Station (MS) in a GPRS telecommunications network, wherein a particular RBS receives a page request, derives the routing area information from the page request and translates it into cell destination information that is further used for paging for the MS.

In accord with the objects of the invention, there is provided in a GPRS cellular telecommunications network, a Radio Base Station (RBS) comprising:

routing area-cell mapping information defining a relation between a routing area (RA) and at least one cell of said RBS; and

a Packet Control Unit (PCU) for processing a page request received from a Serving GPRS Support Node (SGSN);

wherein said PCU associates a RA information extracted from said page request with cell identification information
5 using said routing area-cell mapping information.

In accordance with the objects of the present invention, there is further provided a packet-switched GPRS cellular telecommunications network comprising:

a Serving GPRS Support Node (SGSN);

10 an IP-based Radio Access Network (RAN); and

at least one Radio Base Station (RBS) comprising routing area-cell mapping information;

wherein said routing area-cell mapping information defines a relation between a Routing Area (RA) and at least
15 one cell served by said RBS.

There is yet another object of the invention to provide a method for paging for a Mobile Station (MS) at least one cell of a Radio Base Station (RBS), said method comprising the steps of:

20 receiving by said RBS a broadcast message comprising a Base Station Subsystem GPRS Protocol (BSSGP) page request;

extracting from said broadcast message said BSSGP page request comprising a routing area (RA) information;

translating said RA information into cell identity information based on a RA-cell mapping information stored in said RBS; and

5 paging at least one cell served by said RBS based on said cell identity information.

There is yet another object of the present invention to provide in a GPRS cellular telecommunications network a method for paging for a Mobile Station (MS) at least one cell of a Radio Base Station (RBS), said method comprising the
10 steps of:

receiving by said RBS an IP multicast message;

decapsulating said IP multicast message in the RBS;

extracting from said IP multicast message a Base Station Subsystem GPRS Protocol (BSSGP) message in the RBS;

15 detecting in the RBS if said BSSGP message is a page request message;

if said BSSGP message is a BSSGP page request, translating said RA information into cell identity information based on an RA-cell mapping information stored in
20 said RBS; and

paging at least one cell served by said RBS based on said cell identity information.

Brief Description of the Drawings

For a more detailed understanding of the invention, for further objects and advantages thereof, reference can now be made to the following description, taken in conjunction with
5 the accompanying drawings, in which:

Figure 1 is a top level block diagram of a 2G GPRS network according to the typical prior art implementation;

Figure 2 is a top level block diagram of 3G GPRS network according to the typical prior art implementation;

10 Figure 3.a is a top level block diagram of a 3G GPRS network according to an exemplary preferred embodiment of the present invention; and

Figure 3.b is a top level functional block diagram of a 3G GPRS Radio Base Station according to an exemplary
15 preferred embodiment of the present invention.

Detailed Description of the Preferred Embodiments

Reference is now made to Figure 1, wherein there is shown a high-level block diagram of a known prior art 2G
20 (second generation) GPRS network 10. In a typical page scenario, the SGSN 12 initiates a page using the well known BSSGP protocol, herein enclosed by reference, by sending a BSSGP page request 14 over a Frame Relay (FR) dedicated link
16 to the BSC 18. The PCU 20 of the BSC 18 reads the BSSGP
25 page request 14, and a list of cells related to a given

Routing Area (RA) 22 is derived. Using the list of cells to whom the page is destined, the PCU 20 then sends individual page requests 24_i through the dedicated links 26_i connecting the BSC 18 and the RBSSs 28_i. Thereafter, the RBSSs 28_i
5 broadcast the actual radio page message toward the MSs currently located in their respective cells 27_i.

However, the mentioned scenario comprises a number of drawbacks: first, in the 2G GPRS network 10 shown in Figure 1, all the illustrated links 26_i are dedicated, and this is
10 in course of being replaced by more practical and economical non-dedicated IP-connections. Furthermore, it is believed that the use of IP-based radio access networks, coupled with the development of standard protocols over IP will allow operators to source equipment from many vendors and encourage
15 new equipment vendors in the market, thereby increasing market competition.

Reference is now made to Figure 2, which illustrates a high level block diagram of a proposed 3G (third generation) GPRS network 30, which is known in the prior art.

20 In a typical page scenario, the SGSN 12 initiates a page using the well known BSSGP protocol by sending a BSSGP page request 14 over an FR dedicated link 16 to an IP Gateway node 32. Thereafter, the IP Gateway 32 sends a BSSGP page request over IP 14' to the RNS 34 through an IP based RAN 36. Upon
25 receipt of the page request 14', the RNS 34 interprets the

BSSGP page request over IP 14' using routing area-cell mapping information obtained from the RMCP 38, and determines the destination RBSs and cells that must be paged. Through the same IP RAN 36, the RNS sends a BSSGP page over IP 40_i to
5 the destination RBSs 28_i (assuming that cells served by the three RBSs must be paged) which further interpret the page and then broadcast the actual radio page message over the corresponding cells 27_i.

This proposed prior art scenario still comprises several
10 limitations. First, keeping the page processing intelligence in the RNS 34 creates an unnecessary intermediate step in the transmission of the page request from the SGSN 12 to the RBSs 28_i. Furthermore, the RNS must handle all pages for the IP-based RAN 36. This may overload the finite processing
15 capacity of the RNS node 34.

Reference is now made to Figure 3.a wherein there is shown a high level block diagram of an exemplary preferred embodiment of the present invention related to an improved paging scenario in a 3G (third generation) GPRS network 41.

20 First the SGSN 12 connected to the IP based RAN network 36 (although an IP gateway 32 may exist between the SGSN 12 and the IP based RAN network 36) initiates a BSSGP page message encapsulated in a broadcast message 42 such as for example in an IP multicast message, an IP broadcast message, a network
25 directed broadcast message, or any other type of broadcast

message that would be suitable in a particular implementation within a particular GPRS network. However, according to a particular embodiment of the invention, the broadcast message is preferably an IP multicast message, and the invention is therefore described with reference to an IP multicast message being used for carrying the BSSGP page request, although the invention is not limited to this particular implementation. Thus, the broadcast message 42 may be an IP multicast message sent over the IP-based RAN 36 and directed to a particular routing area 31. Various routers within the IP-based RAN 36 (routers not shown) direct the IP multicast message in such a manner that it reaches all RBSs 29, connected to the RAN 36 and that are part the RA 31 to which the page is addressed. The routing is performed by the IP routers based on the IP header of the IP multicast message that contains a destination multicast address corresponding to the RA 31, as defined by the network operator, in a manner that is known by those skilled in the art, and typically according to the two main standards that governs the use of IP multicast, first, the Request for Comments (RFC) 1112 - Host Extensions for IP Multicasting, and, second, RFC 1584 - Multicast Extensions to Open Shortest Path First (OSPF).

When an RBS joins a multicast group, a request may be sent to and processed by all native multicast routers of the IP-based RAN 36 logically located between the host and the

destination (if no IP tunneling is used). Therefore, when the
SGSN 12 later sends an IP multicast message 42 comprising a
BSSGP page, the multicast routers (not shown) between the
SGSN 12 and the relevant RBSs 29_i are aware that there is a
5 host (the RBS 29_i) on its outgoing side for which this
message is relevant, and therefore let the IP multicast pass
and continue its route toward the RBS. The IP multicast
message is sent between the multicast routers (not shown) of
the IP-based RAN 36 until reaching the LAN router which fully
10 maps the multicast address to its associated host hardware
address. The receiving host's (RBS's) network card and
network driver, such as the RBS's IP Interface 62 shown in
Figure 3.b, listens for this address and passes the incoming
multicast messages to the TCP/IP protocol stack, such as for
15 example to the IP message processor 64 shown in Figure 3.

With reference again to Figure 3.a, according to a
preferred embodiment of the invention, the RMCP 38 that holds
the master routing area-cell mapping table 44 (defining the
relations between the routing areas of the GPRS network 41
20 and the cells corresponding to the RBSs 29_i) also downloads
through the IP-based RAN 36, in each RBS 29_i, a sub-set of
the routing area-cell mapping table 44 directed to that
particular RBS 29_i. For example, the RBS 29₂ will store its
own sub-set RA-cell mapping table 46₂ of the master table 44,
25 which defines, for example, the relation between the RA 31

and its cells 27₄, 27₅, and 27₆ (the RA-cell mapping table 46_i of RBS 29_i is not shown although it is understood that each RBS 29_i comprises, according to the invention, its own RA-cell table 46_i). Furthermore, each RBS 29_i comprises a Packet
5 Control Unit (PCU) functionality 33 that is in charge of interpreting the signaling received and sent to and from the RBS 29_i.

Reference is now made to the RBS 29_i of Figure 3a wherein there is shown an exemplary flowchart diagram
10 illustrating how a page message is processed within each RBS 29_i according to the preferred embodiment of the invention (although only represented for RBS 29_i). First, the broadcast message 42 is received at the RBS 29_i through the RAN 36, action 50. Then the broadcast message 42 is decapsulated and
15 the BSSGP page message is extracted, action 52. Those skilled in the art would readily notice that action 52 may slightly vary depending upon the actual form of the broadcast message. For example, in the case wherein the broadcast message 42 is an IP broadcast message, the treatment may be different than
20 if the broadcast message 42 is an IP multicast message. Besides, the action 52 alone is performed in a manner known by those skilled in the art. Once the BSSGP page message is extracted from the broadcast message 42, the RBS 29_i detects if the extracted BSSGP message is indeed a page message,
25 action 54. This action is necessary since other messages than

a page message may also be transmitted to an RBS in a broadcast message. Assuming that the BSSGP message is actually a page message as detected in action 54, it is also concluded (action not shown) that the received page message is actually directed to the RBS 29₁. This conclusion is possible since the routing of the broadcast message 42 in the RAN 36, based on the broadcast message destination address (such as the IP multicast address in case of the IP multicast message) is done in such a manner that each RBS only receives messages that are relevant for that particular RBS. However, alternatively, if the configuration of the RAN 36 is so arranged that one RBS may receive messages that are not relevant, then the RBS may perform an additional action in order to detect if the page is relevant.

Based on information extracted from the BSSGP page message, the RBS 29₁ then translates the routing area to be paged (RA 31) into cells Ids by consulting the correspondence table 46₁, action 55. As also mentioned hereinbefore, the table 46₁ of the RBS 29₁ comprises the correspondence information between the RA 31 and the cells served by that particular RBS. As a result of the translation 55, the RBS 29₁ knows which cells must be paged for a particular mobile station (MS) 35 according to the received BSSGP page message. Finally, the RBS 29₁ carries out the actual radio paging for

the MS 35 over the required cell, such as for example over the cell 27₃, action 56.

According to the preferred embodiment of the invention, the IP-based RAN 36 is configured to support IP multicast
5 messaging. Therefore, an IP multicast functionality may be used for transmitting the page request from the SGSN 12 to the right RBS by associating an RA 31 to an IP multicast address. The processing within the RBSs is similar to what has been described hereinbefore, but it is believed that by
10 using an IP multicast message for paging, less resources are necessitated for message processing within the RBSs than if an IP broadcast message is employed. This is due to the fact that an IP multicast message is typically processed differently in the RBSs than a regular IP broadcast message,
15 in the sense that for a received IP multicast message the lower network layers of the RBS, such as the datalink (2nd) layer of the RBS, can take charge of the message processing without involving the application (3rd) network layer in that processing.

20 Reference is now made to Figure 3.b, wherein there is shown an exemplary high-level functional block diagram of a possible implementation of the invention within the RBS 29₁.

When a broadcast message 42, such as an IP multicast message 42' comprising a BSSGP page request 43, arrives at
25 the RBS 29₁, first it is received in an IP I/O interface 62

that recognize that the IP multicast message is relevant for the particular RBS. In some implementations, the presence of module 62 is however optional. It is also to be understood that although the invention is herein described with respect to an IP multicast message carrying the BSSGP page request 43 to the RBS 29_i, other types of broadcast messages, such as for example an IP broadcast message, may be used as well for paging according to the invention. Then, the IP multicast message 42' is sent into an IP Message Processor 64 which decapsulates the IP multicast message 42' and extracts the BSSGP page request 43. Afterwards, the BSSGP page request 43 is transmitted in a Page Detector Module 66 for detecting if it is actually a page request, or not. In the affirmative, i.e. if it is detected by the Page Detector 66 that the BSSGP message is a page request, the BSSGP page request 43 is further sent to a RA/Cell Translator 68 for transforming the RA information contained in the BSSGP page request in Ids of the cells that are to be paged. For that purpose, the RBS 29_i comprises a Memory 70, such as a database, a cache, a RAM or other suitable means, for storing its own sub-set of the RA-cell table 46_i. The RA/Cell Translator 68 requests and obtains from the Memory 70 a copy of the RA/Cell mapping table 46_i, and based on this correspondence information translates the RA information into IDs of the RBS' cells to be paged. Once the identity of the cells to be paged are

obtained by the Translator 68, the Transceiver 72 performs the actual radio paging over those cells.

In a variant of the invention's implementation within the RBS 29₁, the Page Detector 66 and/or the RA/Cell Translator 68 may be comprised in the Data Exchange Unit (DXU) or in the same Packet Control Unit (PCU) 33₁ of the RBS 29₁. Furthermore, anyone of the IP Message Processor 64, the Page Detector 66 and the RA/Cell Translator 68 and may be either distinct or joined, software or hardware modules.

According to the preferred embodiment of the invention, the IP Message Processor 64, the Page Detector 66 and the RA/Cell Translator 68 are functional software modules running on the same software operating system and hardware platform within the RBS 29₁.

Although several preferred embodiments of the method and system of the present invention have been illustrated in the accompanying Drawings and described in the foregoing Detailed Description, it will be understood that the invention is not limited to the embodiments disclosed, but is capable of numerous rearrangements, modifications and substitutions without departing from the spirit of the invention as set forth and defined by the following claims.

What is claimed is:

1. In a GPRS cellular telecommunications network, a
Radio Base Station (RBS) comprising:

routing area-cell mapping information defining a
relation between a routing area (RA) and at least one cell
5 of said RBS;

a Packet Control Unit (PCU) for processing a page
request received from a Serving GPRS Support Node (SGSN);

wherein said PCU associates an RA information extracted
from said page request with cell identification information
10 using said routing area-cell mapping information.

2. The RBS as claimed in claim 1, wherein said page
request is comprised in a broadcast message sent from said
SGSN.

3. The RBS as claimed in claim 2, wherein said broadcast
message is an IP broadcast message.

4. The RBS as claimed in claim 2, wherein said broadcast
message is an IP multicast message.

5. The RBS as claimed in claim 1, wherein said routing
area-cell mapping information of said RBS is downloaded from
at least one of a Radio Network management Control point
(RMCP) and a Radio Network Server (RNS) of said GPRS
5 cellular telecommunications network.

6. The RBS as claimed in claim 4,
wherein said RBS further comprises an IP message
processor for decapsulating said IP multicast message and
for extracting a Base Station Subsystem GPRS Protocol
5 (BSSGP) message from said IP multicast message; and

wherein said PCU further comprises:

a Page Detector for detecting if said BSSGP
message is a BSSGP page request, said Page detector
receiving said BSSGP page message from said IP Message
10 Processor; and

a routing area/Cell mapping translator for
translating said routing area information extracted from
said BSSGP page request in said cell identification
information, said Translator receiving said BSSGP page
15 request.

7. The RBS as claimed in claim 6, further comprising:

a memory for storing said routing area-cell mapping information, wherein said translator is linked to said memory, and obtains from said memory said routing area-cell mapping information for translating said routing area information in cell identification information.

8. A packet-switched GPRS cellular telecommunications network comprising:

a Serving GPRS Support Node (SGSN);
an IP-based Radio Access Network (RAN); and
at least one Radio Base Station (RBS) comprising routing area-cell mapping information;
wherein said routing area-cell mapping information defines a relation between a Routing Area (RA) and at least one cell served by said RBS.

9. The GPRS cellular telecommunications network as claimed in claim 8, further comprising:

a Radio Network Management Control Point (RMCP) node for storing a master routing area-cell mapping table
5 defining relations between a plurality of routing areas (RAS) and a plurality of cells of said network;

wherein said routing area cell-mapping information of said RBS comprises a sub-set of said master routing area-cell mapping table, and is obtained from said RMCP by
10 downloading in said RBS a portion of said master routing area-cell mapping table that relates to at least one cell served by said RBS.

10. The GPRS cellular telecommunications network as claimed in claim 8, wherein said RBS further comprises:

a memory for storing said routing area-cell mapping information; and

5 a routing area/cell mapping translator for translating a RA information extracted from a received page request message in cell identification information.

11. In a GPRS cellular telecommunications network a method for paging for a mobile station (MS) in at least one cell served by a Radio Base Station (RBS), said method comprising the steps of:

5 receiving by said RBS a broadcast message comprising a Base Station Subsystem GPRS Protocol (BSSGP) page request;

extracting from said broadcast message said BSSGP page request comprising a routing area (RA) information;

10 translating said RA information into cell identity information based on a RA-cell mapping information stored in said RBS; and

paging in at least one cell served by said RBS based on said cell identity information.

12. The method as claimed in claim 11, wherein said broadcast message is an IP broadcast message.

13. The method as claimed in claim 10, wherein said broadcast message is an IP Multicast message.

14. The method as claimed in claim 13, wherein the step of extracting comprises the step of decapsulating said IP multicast message.

15. In a GPRS cellular telecommunications network a method for paging for a mobile station (MS) in at least one cell served by a Radio Base Station (RBS), said method comprising the steps of:

- 5 receiving by said RBS an IP multicast message;
 decapsulating said IP Multicast message in the RBS;
 extracting from said broadcast message a Base Station Subsystem GPRS Protocol (BSSGP) message in the RBS;
 detecting in the RBS if said BSSGP message is a page
10 request message;
 if said BSSGP message is a BSSGP page request,
 translating said RA information into cell identity information based on an RA-cell mapping information stored in said RBS; and
15 paging in at least one cell served by said RBS based on said cell identity information.

Abstract

In a third generation (3G) General Packet Radio Service (GPRS) network, a method, system and Radio Base Station (RBS) for paging a Mobile Station (MS) wherein a portion of the master routing area-cell mapping table related to a particular Radio base Stations (RBS) is downloaded in that RBS. The serving GPRS Support Node (SGSN) initiates a page request and sends it through an IP based network directly to the RBSSs, without involving the RNS and the RMCP, via broadcast message, such as for example an IP broadcast message or an IP Multicast Message. Upon receipt of the page request, each RBS decapsulates the received message, extracts the routing area (RA) information, derives the cell list to be paged from the RBS resident routing area-cell mapping table and performs the actual radio page broadcast over the destination cells.

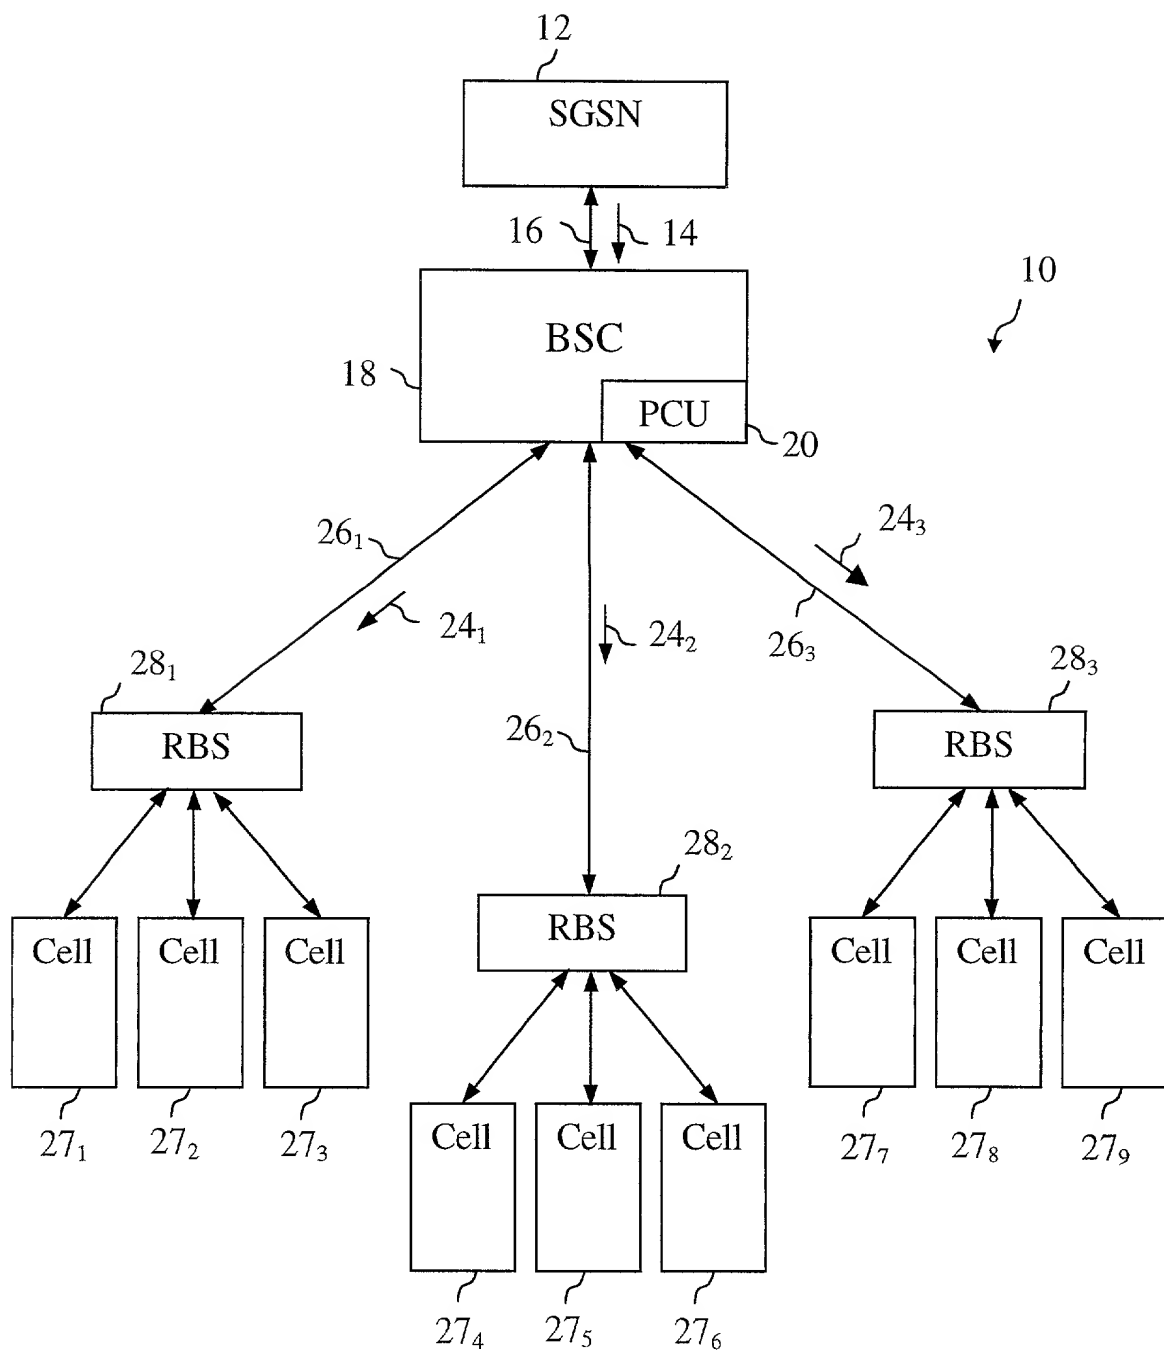


Figure 1 (Prior Art)

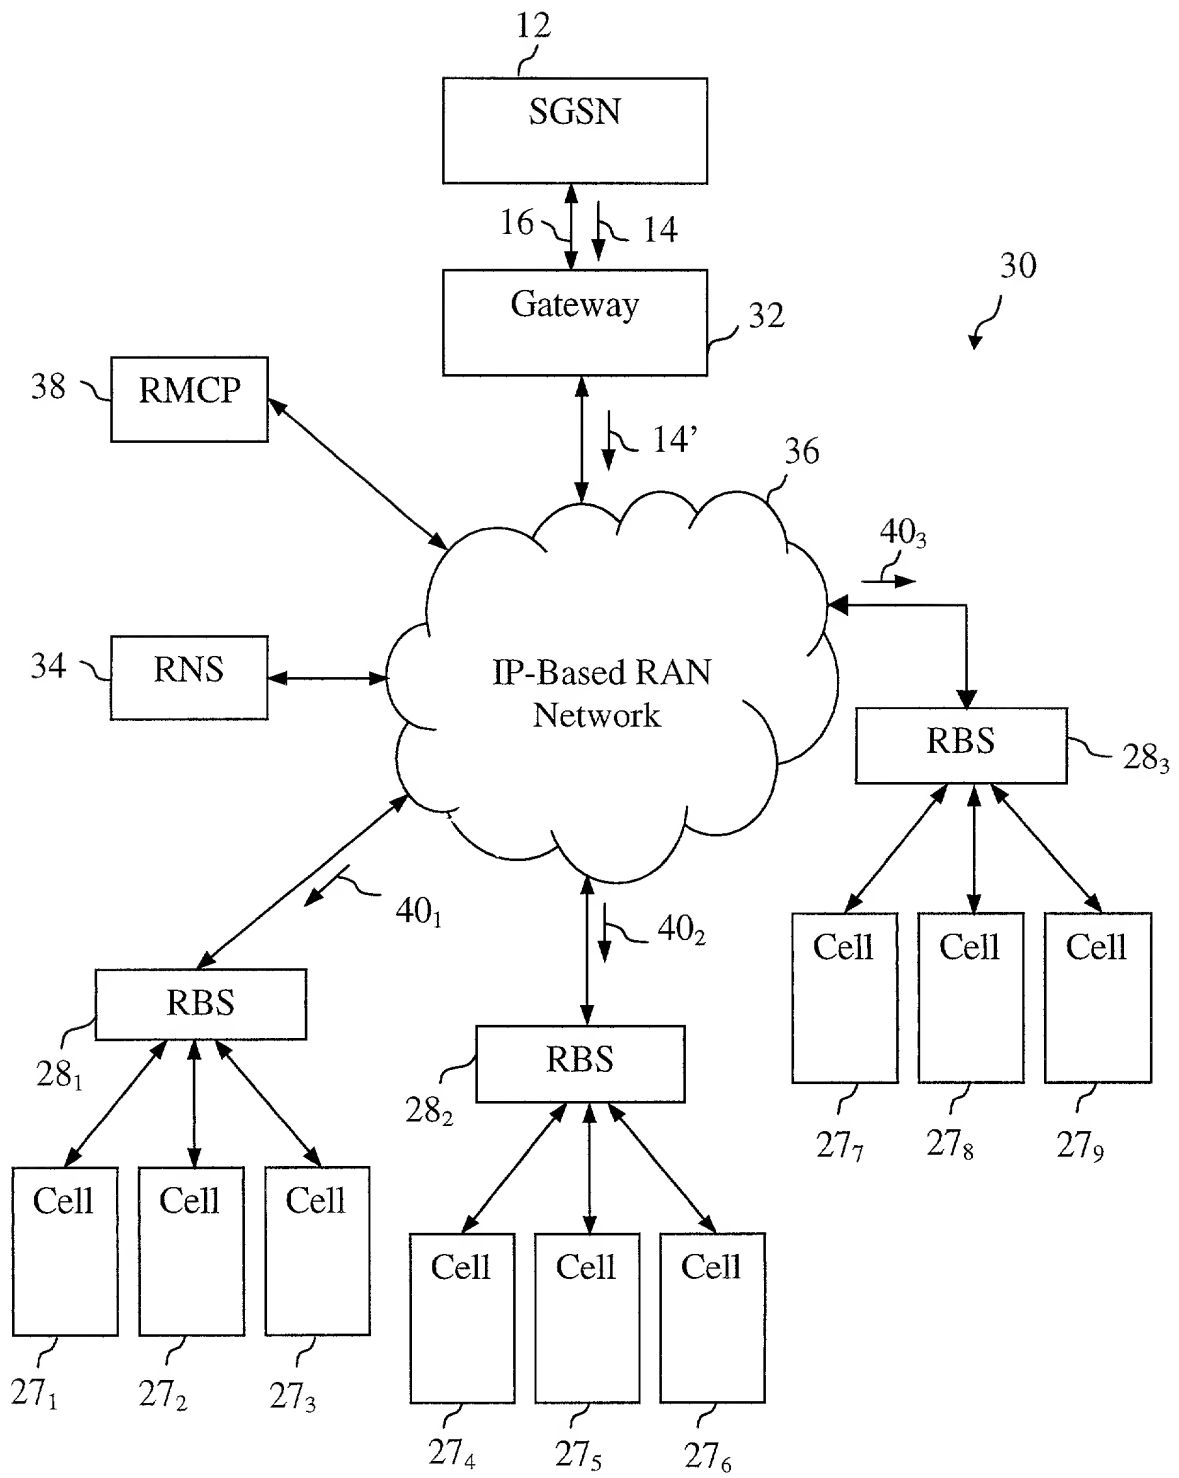


Figure 2 (Prior Art)

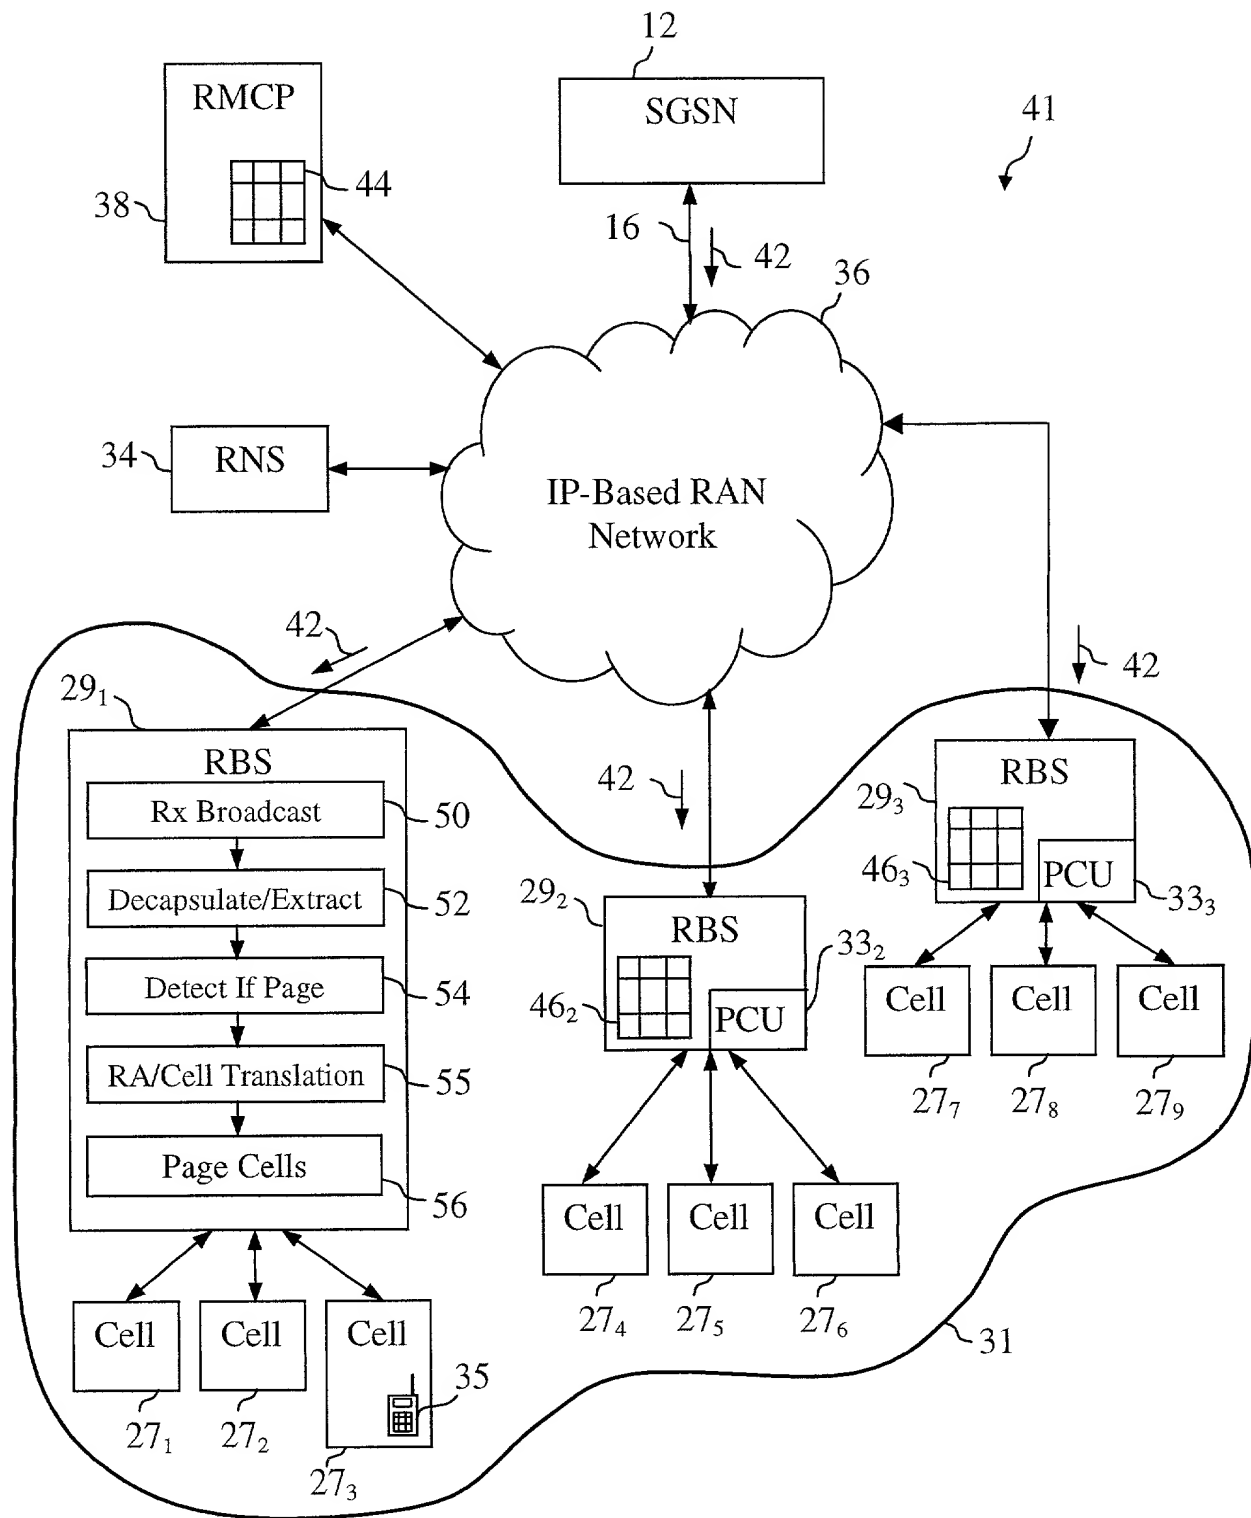


Figure 3.a

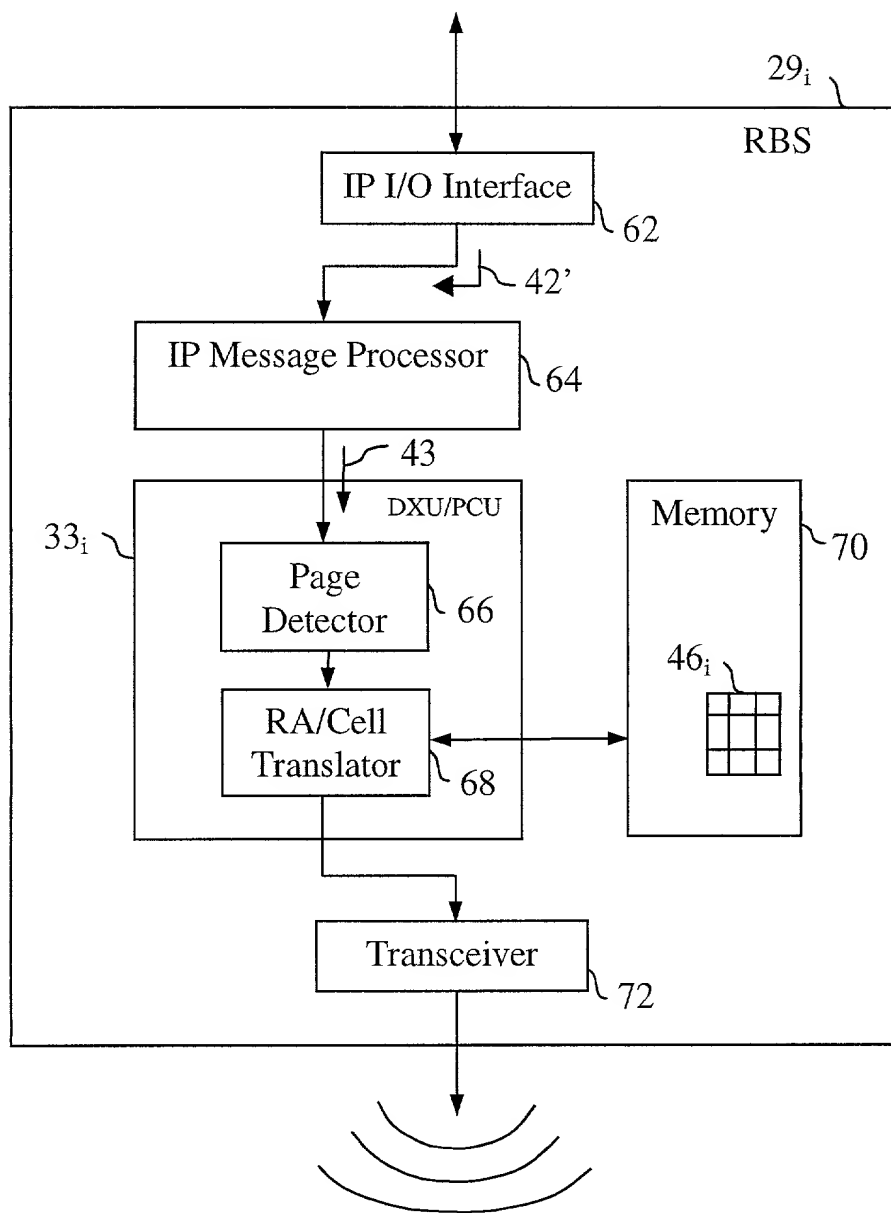


Figure 3.b

**RULES 63 AND 67 (37 C.F.R. 1.63 and 1.67)
DECLARATION AND POWER OF ATTORNEY**

FOR UTILITY/DESIGN/CIP/PCT NATIONAL APPLICATIONS

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name;
and

I believe that I am the original, first and sole inventor (if only one name is listed below)
or an original, first and joint inventor (if plural names are listed below) of the subject
matter which is claimed and for which a patent is sought on the invention entitled:

**METHOD, SYSTEM AND RADIO BASE STATION FOR PAGING A MOBILE
STATION IN A THIRD GENERATION GENERAL PACKET RADIO SERVICE
(GPRS) NETWORK**

the specification of which: (mark only one)

- X (a) is attached hereto.
 (b) was filed on _____ as Attorney Docket No. 27950-410
and was amended on _____ (if applicable)
 (c) was filed as PCT International Application No. PCT/ _____
on _____ and was amended on _____ (if applicable)
 (d) was filed on _____ as Application Serial No. _____
and was issued a Notice of Allowance on _____

I hereby state that I have reviewed and understand the contents of the above identified
specification, including the claims as amended by any amendment referred to above or as
allowed as indicated above.

I acknowledge the duty to disclose all information known to me to be material to the
patentability of this application as defined in 37 CFR § 1.56. If this is a continuation-in-
part (CIP) application, insofar as the subject matter of each of the claims of this application
is not disclosed in the prior United States application in the manner provided by the first
paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose to the Office all
information known to me to be material to patentability of the application as defined in 37
CFR § 1.56 which became available between the filing date of the prior application and the
national or PCT international filing date of this CIP application.

I hereby claim foreign priority benefits under 35 U.S.C. § 119/365 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate filed by me or my assignee disclosing the subject matter claimed in this application and having a filing date (1) before that of the application on which my priority is claimed or, (2) if no priority is claimed, before the filing date of this application:

PRIOR FOREIGN PATENTS

<u>Number</u>	<u>Country</u>	<u>Month/Day/Year</u> <u>Filed</u>	<u>Date first laid-</u> <u>open or</u> <u>Published</u>	<u>Date</u> <u>patented or</u> <u>Granted</u>	<u>Priority Claimed</u>	
					<u>Yes</u>	<u>No</u>
_____	_____	_____	_____	_____	_____	_____
_____	_____	_____	_____	_____	_____	_____

I hereby claim the benefit under 35 U.S.C. § 119(e) of any United States provisional application(s) listed below:

PROVISIONAL APPLICATIONS

<u>Application No. (series code/serial no.)</u>	<u>Month/Day/Year Filed</u>
_____	_____

I hereby claim the benefit under 35 U.S.C. § 120/365 of any United States application(s) listed below and PCT international applications listed above or below:

PRIOR U.S. OR PCT APPLICATIONS

<u>Application No. (series code/serial no.)</u>	<u>Month/Day/Year Filed</u>	<u>Status (pending, abandoned, patented)</u>
_____	_____	_____

I hereby appoint:

H. MATHEWS GARLAND, Reg. No. 19,129	ROGER L. MAXWELL, Reg. No. 31,855
THOMAS L. CANTRELL, Reg. No. 20,849	JEFFERY E. BACON, Reg. No. 35,055
THOMAS L. CRISMAN, Reg. No. 24,846	ANDRE M. SZUWALSKI, Reg. No. 35,701
STANLEY R. MOORE, Reg. No. 26,958	J. KEVIN GRAY, Reg. No. 37,141
GERALD T. WELCH, Reg. No. 30,332	STEVEN R. GREENFIELD, Reg. No. 38,166
P. WESTON MUSSELMAN, JR., Reg. No. 31,644	BRIAN D. WALKER, Reg. No. 37,751
SPENCER C. PATTERSON, Reg. No. 43,849	

all of the firm of **JENKENS & GILCHRIST, P.C.**, 3200 Fountain Place, 1445 Ross Avenue, Dallas, Texas 75202-2799, and

Sandra Beauchesne, Reg. No. 43,422, of Ericsson Canada Inc., 8400 Decarie Blvd., Town of Mount Royal, Quebec, Canada, H4P 2N2


as my attorneys and/or agents, with full power of substitution and revocation, to prosecute this application and to transact all business in the United States Patent and Trademark Office connected therewith, and to file and prosecute any international patent application filed thereon before any international authorities under the Patent Cooperation Treaty, and I hereby authorize them to act and rely on instructions from and communicate directly with the person/assignee/attorney/firm/organization who/which first sent this case to them and by whom/which I hereby declare that I have consented after full disclosure to be represented unless/until I instruct them in writing to the contrary.

Please address all correspondence and direct all telephone calls to:

ANDRE M. SZUWALSKI
Jenkins & Gilchrist P.C.
3200 Fountain Place
1445 Ross Avenue
Dallas, Texas 75202-2799
(214) 855-4795
(214) 855-4300 (Fax)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

NAMED INVENTOR(S)

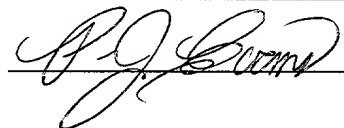Full name:	<u>Paul EVANS</u>	
Inventor's signature:		<u>04/10/2000</u> (Date)
Residence:	<u>6646 ave. Monkland, Montreal, Quebec, H4B 1H4, CANADA</u>	
Citizenship:	<u>CANADA</u>	
Post Office Address:	<u>6646 ave. Monkland, Montreal, Quebec, H4B 1H4</u> <u>CANADA</u>	

(FOR ADDITIONAL INVENTORS, check here ☐ and add additional sheet for inventor information regarding signature, name, date, citizenship, residence and address)